



Full Length Research Article

SEDIMENTATION RATE IN GAJAH MUNGKUR RESERVOIR CENTRAL JAVA, INDONESIA

¹Agus Djoko Utomo, ²Rasyid Ridho, M., ³Dinar DA Putranto and ⁴Edward Saleh

¹Research Institute for Inland Fisheries, Palembang and Doctoral Student of Environmental Science,
University of Sriwijaya

²Mathematic and Science Faculty, University of Sriwijaya

³Civil Engineering Faculty, University of Sriwijaya

⁴Agriculture Faculty, University of Sriwijaya

ARTICLE INFO

Article History:

Received 19th January, 2012
Received in revised form
21th February, 2013
Accepted 11th March, 2013
Published online 13th April, 2013

Key words:

Sedimentation,
Water Volume,
Siltation,
Reservoir.

ABSTRACT

Gajah Mungkur reservoir is a multipurpose reservoir with broadness of 8,800 ha. Its functions mainly for irrigation, hydroelectric power, source of drinking water, tourism, aquaculture and fisheries. Presently the sustainability of reservoir function is distressed by emerging of sedimentation. The sedimentation may be reduced water volume, create siltation, decrease carrying capacity, create rust and corrosion on the turbine engine. The aims of the research is to observe the sedimentation rate at Gajah Mungkur Reservoir as a base line study on the reservoir management model. The research has been conducted at Gajah Mungkur Reservoir, Central of Jawa during the period of February to Desember 2011. In order to estimate bathymetry of this reservoir the acoustic survey methods has been applied whilst the sediment traps is applied to estimate the sedimentation rate. The results of this research showed that maximum depth was 16 m, average depth was 6.07 m, average water volume was 428,912,270 m³. Compared to the situation when the reservoir was built in 1981/1982 the average depth was 9 m, average water volume was 630.000.000 m³. It is mean that after 28 years, there is a reduction of water volume about 201.088.000 m³ and reduction of water depth 2.93 m. The sedimentation rate was higher during the rainy season i.e. 2.76 m³/ha/day, whilst during the dry season i.e. 0.96 m³/ha/day. The average sedimentation rate in one year was 6 cm / year, 593.71 m³/ha/year, 822.53 tons/ha/ year.

© Copyright, IJDR, 2012, Academic Journals. All rights reserved.

INTRODUCTION

Reservoir poses not only a strategic value but also multipurpose use for the economic activities. (Sukimin, 2008). Gajah Mungkur reservoir is situated at the Solo River constructed during the period of 1981 to 1982 by drowning 51 villages and 67,157 people relocated out of Java through transmigration scheme. This reservoir is located in Wonogiri District Central Java, with water surface area 8,800 ha, 140 above sea level. Gajah mungkur reservoir is multipurpose reservoir. Initially, it functions was for irrigation, hydroelectric power, source of drinking water, however, it also attract for tourism, aquaculture and fisheries (Utomo, *at al* 2010). The problem encountered were sedimentation and eutrophication. Sedimentation derived from erosion of rainwater runoff and erosion from the upper stream of the river. Eutrofication derived from anthropogenic factors such as agricultural, domestic and industrial wastes, as well aquaculture such as floating cage culture (Sukimin, 2008). Currently, the sustainability of reservoir function is distressed by emerging

of sedimentation. Sedimentation can reduce water volume, siltation, reduce carrying capacity, rust and corrosion on the engine turbine. When the reservoir was built in 1982, sediment thickness up to 3 mm / year. In 2000, sediment thickness reached 8.8 mm / year (Departemen Pekerjaan Umum Dirjen Pengairan, 1992; Direktorat Pengelolaan Bengawan Solo, 2003). Twenty four years later from the time when this reservoir began to operates in 1984, the volume of sediment entered the reservoir up to 168.719 million meters cubic, which is the average of sedimentation rate per year was 7.03 million meters cubic while the effective volume for irrigation remain 341 million meters cubic (Direktorat Pengelolaan Bengawan Solo, 2008; Jasa Tirta, 2008). The volume of water in the reservoir has also been affected to the carrying capacity of fish culture. The large volume of water will be more carrying capacity of fish culture. Small volume of water that otherwise would be less carrying capacity of fish culture (Utomo, *et al.*, 2011). In order to formulate the policy on the sustainable water resources development at Gajah Mungkur Reservoir for present and the future, the main problems and

*Corresponding author: agusrgplg@yahoo.com

challenges should be taken into account. The key factor causing the above mentioned problems was the high volume of sediment entered into the reservoir. The aims of the research is to observe the sedimentation rate at Gajah Mungkur Reservoir as a base line study for reservoir management model.

MATERIAL AND METHODS

The study was conducted in Gajah Mungkur Reservoir Wonogiri Central of Java on Februari 2011, Juli 2011, November 2011 and December 2011. The research methodology were direct observation to the field and laboratory analysis of materials samples have been collected during that periods.

Acoustic Survey

In order to estimate the bathymetry of the reservoir, the acoustic survey using Simrad EY 60 was conducted in February 2011 (Table 1).

Table 1. Acoustic equipment

No	Equipment	Used
1	Acoustic: Portable Scientific Echosounder SIMRAD EY-60, transducer 120 KHz	The main equipment acoustic
2	One unit portable power generator, 1000 Watt	Electricity power
3	Wooden boat 8 GT.	Transporting and installing acoustic equipment
4	Laptop with memory >2 GB, Hardisk >80 GB	Data acquisition
5	Personal Computer (PC). Memory >2 GB, Hardisk >80 GB	Post processing data
6	Software ER60	Processing data
7	Software SONAR-4	Processing data
8	Software Microsoft Excel	Data Tabulation

The acoustic is placed on the right hand side of the 8 GT wooden boat. The placement of the equipment was to avoid the noise from the muffler of the boat. Since the reservoir is a closed area, therefore, the design of the transect to measure the depth was by zig-zag method. This method is to prevail the bathymetric from reservoir side to the centre in order to Figure out its contour (Figure 1) (FAO, 1980). Reservoir bathymetry data were compared to data when the reservoir was built, subsequently we get the reduction of water volume as a result of sedimentation that entered into the reservoir (Jasa Tirta, 2008; Fakultas Perikanan dan Ilmu Kelautan Universitas Riau, 2009; Dirjen Sumberdaya Air dan Pusat Studi Ilmu Teknik Universitas Gajah Mada, 2003).

Estimation of sedimentation rate by using sediment traps

The study has been conducted at nine sites representing the type of water reservoir:

- Middle Site near the island;
- Inlet of Wiroko Site;
- Middle Site near cage culture of PT. Aquafarm;
- Cage Culture area Site;
- Inlet of Keduang Site;
- Outlet Site;
- Inlet of Bengawan Solo Site;
- Inlet of Alang Site;
- Inlet of Wuryantoro Site (Figure 2)

Sediment traps were placed in the bottom waters for a few days. Sediment deposition in sediment traps were analyzed in the laboratory. The sedimentation rate was calculated using the following formula (APHA 1986; Morgan, 1979; Sulisty, 2000):

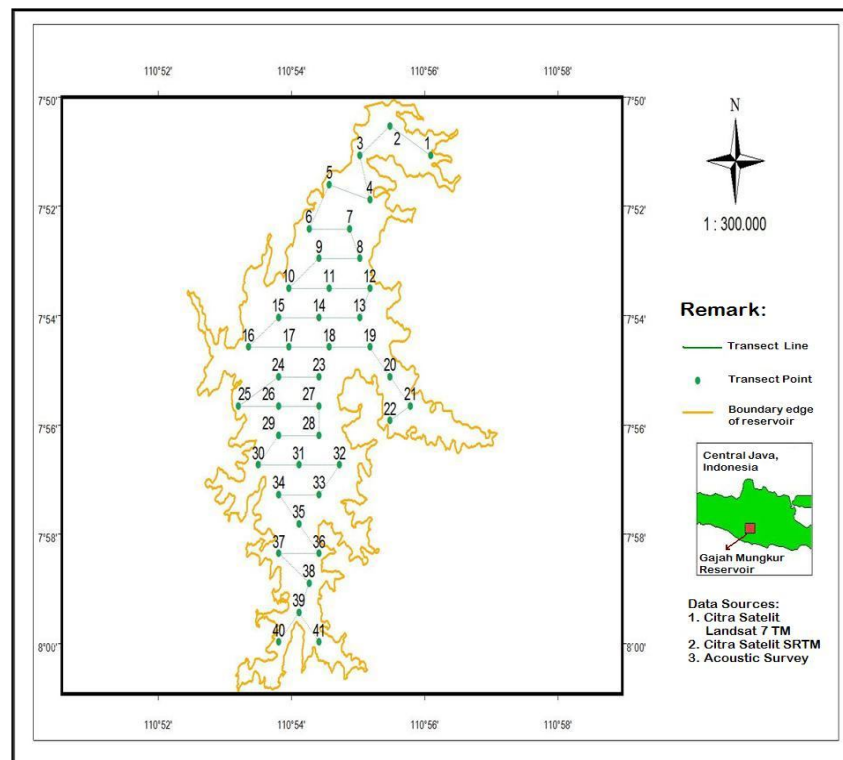


Figure 1. Acoustic transects design in Gajah Mungkur Reservoir

$$L_s = \frac{W / A}{T}$$

Remarks

- L_s = Sedimentation rate (ml/cm²/day, or gram/cm²/day)
- W = Sediment deposition (gram, or ml)
- A = Square of sediment traps
- $A = \pi \cdot r^2$ (cm²)
 r = radius circle of sediment traps (5, 25 cm)
- T = Interval time (day)

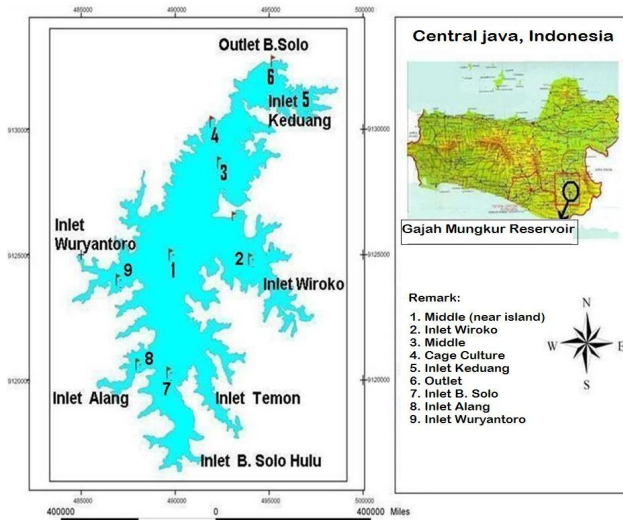


Figure 2. Location Site Map of Sedimentation Sampling

RESULT AND DISCUSSION

Based on the acoustic survey (Table 2 and Figure.3); the result showed that maximum depth of Gajah Mungkur Reservoir was 16 m with the average depth of 6.07 m and the average water volume was 428,912,270 m³. Compared to the reservoir when was built in 1981 to 1982: the average depth was 9 m and average water volume was 630,000,000 m³. In other words, there is a reduction of water volume of 201,088,000 m³ and reduction of water depth 2.93 m after 28 years later. The reduction in the depth and water volume was due to the sedimentation entered into the reservoir. The catchments area around reservoir is 70% made up of yard, moor, and dry land. The forests may bear up erosion only 13.2%, the banks of the river into the reservoir often to grow crops (Wijarnako, 2010)

Table 2. Depth, Vast dan Water Volume of Gajah Mungkur Reservoir

Depth (m)	Vast (m ²)	Volume (m ³)
>0- 2	16.710.000	33.420.000
>2- 4	12.840.000	38.520.000
>4- 6	9.549.000	47.745.000
>6- 8	5.508.000	38.556.000
>8- 10	8.701.000	78.309.000
>10- 12	7.319.000	80.509.000
>12- 14	6.148.000	79.924.000
>14- 16	3.886.000	58.290.000
Average depth 6,07 m	70.661.000	Average Water Volume 428.912.270

Based on the experimental of sediment traps (Table 3); the result showed that the average of siltation: (0,012 cm/day + 0,010 cm/day + 0,028 cm/day)/3=0,016 cm/day, or 6 cm/year.

The average sadimentation rate in units of volume (ha) was (1,15 m³/ha/day + 0,96 m³/ha/day + 2,76 m³/ha/day)/3=1,63 m³/ha/day, or = 593,71 m³/ha/year. The average of sedimentation in units of weight (ton) was (1,48 ton/ha/day + 1,69 ton/ha/day + 3.59 ton/ha/day)/3= 2,25 ton/ha/day, or 822,53 ton/ha/year. The Sedimentation rate was larger during the rainy season (2.76 m³/ha/day) than during the dry season (0.96 m³/ha/day) due to the land affected by erosion entered into the reservoir, particularly land around the reservoir that used by the farm communities.

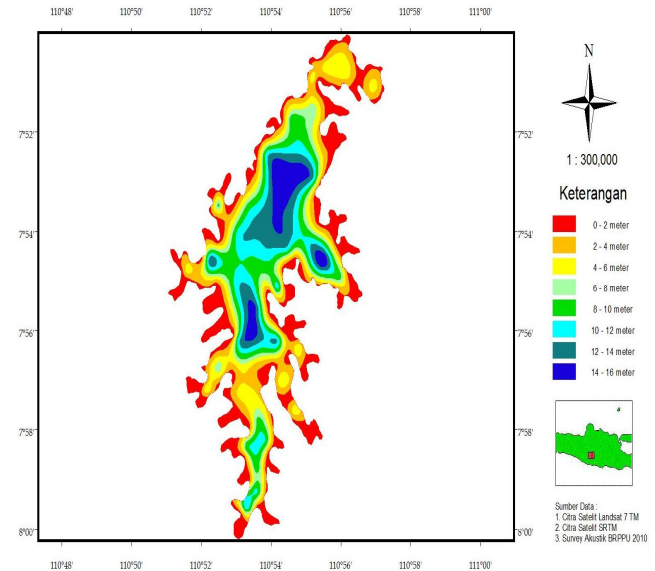


Figure 3: Bathymetry Map of Gajah Mungkur Reservoir

Table 3. Sedimentation Rate at Gajah Mungkur Reservoir

Location and Month	Sedimentation Rate		
	Cm/day	m ³ /ha/day	ton/ha/day
A. November 2009			
1. Inlet Wiroko	0,006	0,58	0,59
2. Tengah I	0,012	1,15	1,51
3. KJA PT Aquafarm	0,006	0,58	1,88
4. KJA Masyarakat	0,012	1,15	0,74
5. Outlet	0,023	2,31	2,68
Average	0,012	1,154	1,48
B. Juli 2010			
1. Tengah I	0,012	1,18	2,27
2. KJA PT Aquafarm	0,013	1,33	2,28
3. KJA Masyarakat	0,006	0,62	1,07
4. Outlet	0,007	0,72	1,14
Average	0,010	0,96	1,69
C. December 2011			
1. Inlet bengawan Solo	0,036	3,60	4,68
2. Inlet Alang	0,030	2,98	3,87
3. Inlet Wuryantoro 1	0,026	2,62	3,41
4. Inlet Wuryantoro 2	0,040	3,99	5,19
5. Inlet Wiroko 1	0,045	4,48	5,83
6. Tengah I	0,015	1,51	1,96
7. Inlet keduang	0,013	1,33	1,73
8. Outlet	0,016	1,59	2,08
Average	0,028	2,76	3,59

Conclusions

- The sedimentation rate in Gajah Mungkur Reservoir was 593.71 m³/ha/year and it is considered to be very high.
- The reduction in the depth and water volume was caused by sedimentation process entered into the reservoir.

Recommendations

In order to recover the reservoir as was built, using land on the banks of the reservoir for agriculture is not allowed and it is highly recommended to lift the silt from reservoir.

REFERENCES

- APHA, 1986. Standard methods for the examinations of water and wastewater. APHA Inc, Washington DC. 986 p.
- Departemen Pekerjaan Umum Dirjen Pengairan, 1992. Rencana Pengelolaan Lingkungan Waduk Wonogiri. Lembaga Penelitian UNDIP, Semarang. 64 hal.
- Direktorat Pengelolaan Bengawan Solo, 2003. Ringkasan Bendungan Serbaguna Wonogiri. Solo. 14 hal.
- Direktorat Pengelolaan Bengawan Solo, 2008. Rencana Operasional Waduk Gajah Mungkur. Jasa Tirta I. Solo-Surakarta. 18 hal.
- Direktorat Pengelolaan Bengawan Solo, 2010. Rencana Operasional Waduk Gajah Mungkur. Jasa Tirta I. Solo-Surakarta. 21 hal.
- Dirjen Sumber daya Air & Pusat Studi Ilmu Teknik UGM, 2003. Studi Optimalisasi Pola Eksploitasi dan Pemutakhiran Data Kapasitas Waduk Kedung Ombo dengan Pengukuran Echo Sounding. Yogyakarta. 55 hal.
- Fakultas Perikanan dan Ilmu Kelautan Universitas Riau, 2009. Pemantauan Pelaksanaan Rencana Pengelolaan Lingkungan PLTA, Koto Panjang. Fakultas Perikanan dan Kelautan UNRI, Riau. 50 hal.
- FAO, 1980. Echo-Sounding and Sonar for Fishing. Fishing New Books Ltd. Surrey, England. 104 p.
- Jasa Tirta, 2008. Pekerjaan Pengukuran Echo Sounding Waduk Wonogiri. Jasa Tirta I. Solo-Surakarta. 136 hal.
- Morgan, C 1979. Soil Erosion. Logman, London. 394 p.
- Pusat Litbang SDA 2007. Sumberdaya air. <http://www.bapeda-jabar.go.id>. 7 April 2010.
- Simrad, 1993. Simrad EY-60 Scientific Echosounder. Instrumen Manuel. Horten-Norway. 212 p.
- Sukimin, S. 2008. The application of phosphorus loading model estimating the carrying capacity for cage culture and Its productivity of Saguling Reservoir, West Java, Indonesia. Proceeding, International Conference on Indonesian Inland Waters. Research Institute for Inland Fisheries Palembang. 99- 104.
- Sulistyo, 2000. Studi Laju Sedimentasi di Kawasan Hutan Mangrove Rembang. Fakultas Perikanan dan Kelautan Undip. Semarang. 52 hal.
- Utomo, AD., M.R Ridho., D.DA. Putranto dan E. Saleh 2010. The Water Quality Assessment at Gajah Mungkur Reservoir. Proceeding International Conference on Indonesian Inland Waters II. Research Institute for Inland Fisheries. pp:123 - 133
- Utomo, AD., M.R Ridho., D.DA. Putranto dan E. Saleh 2011. Keanekaragaman Plankton dan Tingkat Kesuburan Perairan di Waduk Gajah Mungkur. BAWAL. Jurnal Widya Riset Perikanan Tangkap Jakarta. 3(6): 415-422.
- Wijanarko, D 2010. Sosial Ekonomi Masyarakat di Waduk Gajah Mungkur. <http://www.sastrowijanarko.blogspot.com/> 10 Juli 2012.
